



NOTES:


1. All document sheets have the same revision.
2. Unless otherwise specified all resistors values are in ohms.
3. Jumpers only affect the DC Voltage Indicators
4. Jumpers should be configured based on the Voltage Range of the Output
5. The dot denotes pin 1 (On PCB and Schematics)
6. JP1 is for LD1, JP2 for LD2, a.s.o.
7. JP1 & JP2: 1-2: 5 to 20Volts, 2-3: 6 to 40Volts
8. JP3-JP6: 1-2: 8 to 80 Volts, 2-3: 6 to 40 Volts
9. LD7-9 are for 115 Volt 400Hz
10. LD10 is for 115 Volts 60Hz Single Phase
- 11.
- 12.
- 13.
- 14.
- 15.
- 16.



Logo & Warnings



Revision History					
Rev	Sh	Zone	Description	Date	Name
A.a	All	All	First Release	07-01-2015	N. Bricteux

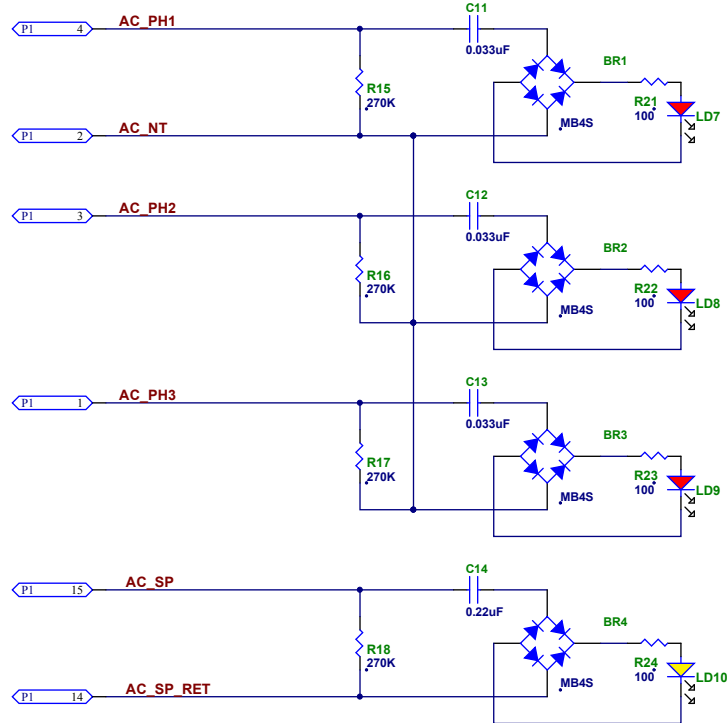

RESTRICTED PROPRIETARY INFORMATION

Marvin Test Solutions, Inc. Proprietary rights are included in the information enclosed herein. No part of the information provided in this document may be reproduced, transferred to other documents, used, or disclosed to others without the prior written consent of Marvin Test Solutions, Inc.

APPLICATION

NEXT ASSY	USED ON
Common	Common


MARVIN TEST SOLUTIONS
Marvin Test Solutions, Inc
1770 Kettering
Irvine, CA 92614 USA
www.marvintest.com

Title: Generic ITA Indicator Board				
CAGE Code: 056D8	Part Number: 3999-402-00	Part Rev.: A	Document Number: 3999-402-00-SCH	Doc Rev.: A.a
File: 3999-402-00-SCH-01-Aa.SchDoc				Size: B
Created By: N. Bricteux	Checked By: L. Parsons	Engineer: N. Bricteux		
Approved By: L. Parsons	Last Update: 7/9/2015	Sheet 1 Of 3		

